

Requirement / Spannung :

HY 115: 1Ph 75-125 / 60Hz
 HYSTREAM 115: 1Ph 100-115V / 50-60Hz
 HY 230: 1Ph 200-230V / 50-60Hz
 HYSTREAM 230: 1Ph 200-230V / 50-60Hz

Power / Leistung :

115V: 1,2 kW / 1,6 HP – 15 Ampere
 230V: 1,2 kW / 1,6 HP – 7 Ampere

Dimensions / Abmessungen:

A = 18,8" (480 mm)
 B = 9,8" (250 mm)
 C = 16,1" (410 mm)


Weight / Gewicht:

~57 lbs (26 kg) – without oil

HY 115
 only 60Hz

HY 230
HYSTREAM 115
HYSTREAM 230

50-60 Hz
 3-stage

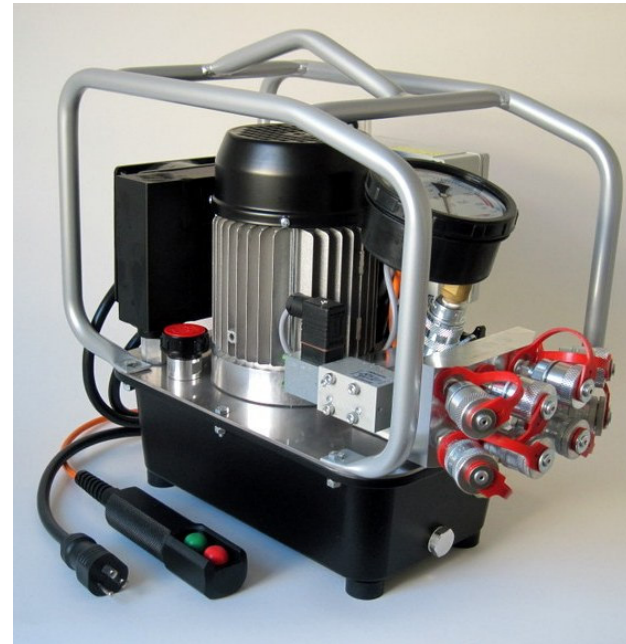

General with:

Oilcooler
 Gauge psi/bar FS 1% (KI 1.0)
 Remote control 24V – 15 ft (5 m) length
 4-Tool-Adapter
 Tank G5: volume = 1,35 Gal (5 Ltr.)

Option:

Semi-automatic (-A)
 Full-automatic (-FA1)
 Calibrated gauge with certificate
 Remote control 24V – 30 ft (10 m) length
 Docum. –System (-DOC)
 Tank G8: volume = 2,1 Gal (8 Ltr.)

Specifications:	(not HY115)	
	50Hz	60Hz
Max. oil flow: 1000 psi (70 bar)	510 cu.in./min. (8,0 l/min.)	620 cu.in./min. (10 l/min.)
Middlepressure oil flow: 4 000 psi (300 bar)	100 cu.in./min. (1,6 l/min.)	120 cu.in./min. (2,0 l/min.)
Highpressure oil flow: 10 000 psi (700 bar)	55 cu.in./min. (0,9 l/min.)	65 cu.in./min. (1,1 l/min.)